

Waste management plan for Ship Generated Waste. Copenhagen Malmö Port, Copenhagen

	Section 1	About C	Copenhagen	Malmo	Port
--	-----------	---------	------------	-------	-------------

Section 2 Purpose

Section 3 Responsibility and liability

Section 4 General information about CMP waste reception facilities:

- Reception facilities
- Offloading and notification obligations (SafeSeaNet)
- Ordering from CMP
- · Payment for reception of waste
- Waste delivery receipt & Registration of collected quantities
- · Consultations and reporting on inadequate waste reception facilities
- Legislation

Section 5 Oily residues

Section 6 Oily tank washing residues.

Section 7 Scrubber washing water and residues.

Section 8 Sewage.

Section 9 Residual waste, food, and recyclable fractions

- Special points of interest
- Small combustible
- Large combustible
- CMP own reception on Oceankaj (Cruise ships)
- Signage on waste containers
- · Map of permanently available containers

Section 10 Hazardous waste

Section 11 Incinerator ash and other solid substances

Section 12 Waste Operators

Annex 1 CMP Waste order form 2022 – available at www.cmport.com

Annex 2 Form for reporting alleged inadequacies of waste reception facilities

Annex 3 Oily tank washings and Scrubber (fluid), Exhaust gas-cleaning residues

Scrubber (fluid), AEP scrubber effluents (fluid) - available at www.cmport.com

Annex 4 Sewage (Black water and Grey water) - available at www.cmport.com



ABOUT CMP

CMP is a Swedish-registered limited liability company. The company a is port- and terminal operator in Copenhagen (Denmark) and Malmö (Sweden). The company is owned by Udviklingsselskabet By & Havn I/S (50 %), Malmö stad (27 %) and various private owners with 23 % of the shares in total.

Contact informations:

Copenhagen Malmö Port AB Containervej 9 2150 Nordhavn, Copenhagen, Denmark Tlf. +45 35 46 11 38 (24 H) portoffice@cmport.com

<u>Harbour Master</u>
Jesper Mandrup Timler
+45 3546 1131
Jesper.timler@cmport.com

<u>Environmental officer</u> Jonatan Stoltz Holgersson

PURPOSE

The purpose of this waste plan is to describe reception facilities at Copenhagen Malmö Port's operating areas in Copenhagen. CMP is affiliated to the UN Global Compact and wishes to support the UN World Goals.

It is essential that the delivery of waste and cargo residues is carried out as described in this plan to ensure the protection of the marine environment and to ensure the best possible use of waste resources. CMP encourages our customers to work for an optimal separation of waste fractions just as CMP ensures that recyclable fractions are used environmentally correctly. It is also a basic principle of our reception facilities that hazardous waste must not be diluted or mixed with other hazardous waste.



Responsibility and liability

According to BEK No 1396 of 25/11/2016 Applicable (Hereinafter BEK No 1396) Chapter 6 § 15, the manager of the port must draw up and maintain a plan for the reception and handling of waste from ships. The waste plan can be found on the CMP website www.cmport.com.

The shipowner shall be aware of the accuracy of the master's/agent's information on waste, nature, composition, quantities, and time of collection.

General information about CMP waste Reception Facilities

Reception Facilities

According to current legislation and guidelines, CMP has established the following reception facilities in CMP's operating areas in Copenhagen.

CMP's reception facilities consist of containers for waste, mobile tankers for slop and sewer spill water, and a fixed reception system for sewage wastewater at Oceankaj. All waste is collected and collected by approved transporters registered in the Danish Environmental Protection Agency's waste register, see Chapter 11.

According to the Executive Order on Standard Rules for Compliance with Order in Danish Commercial Ports § 21, waste may, unless otherwise agreed with the port authority, not be unloaded, or placed on the port area. Installed waste containers must not be used for environmentally harmful and hazardous products, substances, and materials. Containers are intended only for general ship-generated waste. Under the Executive Order on Standard Regulations for Compliance with Order in Danish Commercial Ports § 23, it is prohibited to incinerate, flush, pump out or deposit any solid or liquid waste, including oil, chemicals, toilet waste, liquid waste from the ship's gutters and the like, as well as residues or water containing such substances, in the port area.

Offloading and notification obligation (SafeSeaNet)

In accordance with SO no. 1396 Chapter 4 Section 11, the master of a ship calling at a port is obliged to ensure that all operational waste and cargo waste are discharged to the port reception facility; however, in accordance with paragraph 2, which provides that, if the notification stated in Section 12 is documented, and if the quantities of waste involved are small and can be retained on board in an environmentally safe manner, and if the waste, together with waste subsequently generated, can be discharged at a later port of call, the master is exempt from the obligation under item 1.

According to BEK No 1396 Chapter 4 § 12(3), notification must be made electronically via SafeSeaNet.



Ordering from CMP Annex 1

Ships that, in accordance with their obligation to notify SafeSeaNet, wish to land waste at CMP in Copenhagen, must complete and send **Annex 1 CMP Waste order form 2022**, by e-mail to the Port office.

- E-mail <u>portoffice@cmport.com</u> (24H)
- Phone +45 35 46 11 38

Annex 1 CMP Waste order form 2022 should be forwarded at least 24 hours in advance of arrival or upon departure of the previous port if the voyage is less than 24 hours.

For Emergency pyrotechnics, MOB smoke floats and Fire extinguisher at least 3 working days of notice must be given; see Section 11.

Payment for reception of waste

According to the Order on ship waste reception facilities, the delivery of waste by ships and the waste plans of ports, payment for the reception and management of ship-generated waste shall be included in the normal port levy. However, the driver of the port shall be entitled to demand a separate payment as described in Section 13 of BEK No 1396 of 25/11/2016).

Driftsaffald

Waste is defined as: any waste, including waste water, and residues other than cargo residues produced while a ship is in operation and falling under Annex I (Oil), IV (Sewage) and V (Garbage) to Marpol 73/78, as well as cargo-related waste as defined in the Guidelines for the implementation of Annex V to Marpol 73/78.

Lastrester

Cargo residues are defined as: residues of cargo materials in cargo holds or tanks after unloading and cleaning, including residues from the load and spillage during loading/ unloading.

As regards the collection of the part of the waste related to the ship's cargo, CMP has set up reception facilities. The costs of disposing of cargo residues are borne by the ship and settled according to the CMP's List of Charges.

For state ships and other ships that do not pay normal port charges, the fees are also settled according to the CMP's List of Charges.



Waste delivery receipt & Registration of collected quantities

Once CMP has received documentation of collection, treatment and disposal, the Waste receipt will be sent to the ship/ agent.

Once ships have delivered waste, ownership of CMP is transferred. Waste fractions and quantities per ship/facility are recorded on an ongoing basis. Proof of destruction by incineration shall be forwarded to the Border Veterinarian in Copenhagen. Waste management costs are available on CMP's website.

Consultations and reporting on alleged inadequate waste reception facilities

CMP conducts continuous visual inspection of existing reception facilities and continuously organises facilities so that there is always sufficient capacity. The Port shall consult with representatives of users, subcontractors and other interested parties to the extent necessary.

Any reports of insufficient capacity from port users shall be processed on an ongoing basis in order to ensure adequate capacity. If a ship considers that there are insufficient reception facilities available for delivery, contact CMP's contact persons, see **Fejl! Henvisningskilde ikke fundet.**.

If the master or agent of the ship subsequently considers it necessary to draw the attention of the environmental authorities to alleged inadequate or inadequate reception facilities, Annex 2 may be requested. The completed form is sent to the Port Captain (see **Fejl! Henvisningskilde ikke fundet.** who will then send a copy to the Danish Environmental Protection Agency.

Legislation

Danish Act on the Protection of the Marine Environment (Consolidated Act no. 1165 of 25/11/2019 In force) https://www.retsinformation.dk/Forms/R0710.aspx?id=192639

Statutory Order no. 1396 of 25/11/2016 In force - Statutory Order on Reception Facilities for Waste from Ships, on Ships' Offloading of Waste and the Ports' Waste Management Plans https://www.retsinformation.dk/Forms/R0710.aspx?id=184900

Statutory Order on Standard Regulations for the Observance of Good Order in Danish Commercial Ports Section (SO no. 1146 of 25/11/2004 In force)

https://www.retsinformation.dk/forms/r0710.aspx?id=22340

SO no. 1220 of 22/11/2019 In force - Statutory Order on the Sulphur Content in Solid and Liquid Fuels https://www.retsinformation.dk/Forms/R0710.aspx?id=131864



Guidance no. 9271 of 7/6/2010 In force - Guidance on the collection, transportation and disposal of food waste from ships and aircraft engaged in international voyages to ports and airports as well as Category 1 waste from border inspection and customs checks etc.

https://www.retsinformation.dk/Forms/R0710.aspx?id=131864

The City of Copenhagen Regulations for commercial waste (effective 09/28/2018) https://kk.sites.itera.dk/apps/kk_pub2/index.asp?mode=detalje&id=1873

Directive 2019/883/EC of the European Parliament and of the Council on port reception facilities for ship-generated waste and cargo residues

https://eur-lex.europa.eu/legal-content/DA/TXT/?uri=CELEX:32019L0883

MARPOL 73/78, IMO, International Maritime Organization



Oily residues (Sludge and bilge water)

In accordance with the Act on the Protection of the Marine Environment Chapter 2 Section 11, the discharge of oil must not take place in Danish territorial waters.

In accordance with SO no. 1396 Chapter 2 Section 6, in respect of oily operational waste, the port operator shall ensure that a port reception facility is established for sludge, used lubrication oil, oily mixtures from the engine room bilges, oily tank washings and other oily residues.

Specific provisions and points of attention

- 1. Mobile receiving facility. The separated and cleaned oil is recycled.
- 2. As sludge, CMP receives oil-containing waste that does not contain emulsifiers or other chemicals that prevent separation in an oil and water phase. Oily waste where these types of chemicals are mixed can be received as hazardous waste.
- 3. Reception under "no special fee" is under conditions as described in section **Fejl! Henvisningskilde ikke fundet.**, the absence of emulsifying or other chemicals that prevent separation in an oil and water phase, and the use of standard flange dimensions as shown in the table below.

Standard dimensions for flanges:


Description:	Dimensions:
External diameter:	215 mm
Internal diameter:	Equivalent to the pipe's external diameter
Bolt ring diameter:	183 mm
Flange cut outs:	6 holes with a diameter of 22 mm to be placed at equal intervals on a bolt ring of the aforementioned diameter cut out to the flange's circumference. The breadth of the cut-out must be 22 mm.
Flange thickness:	20 mm
Bolt and nuts:	6, each of 20 mm in diameter, of a suitable length
number and diameters	

The flange must match pipes with an internal diameter of up to 125 mm and must be of steel or oth-er equivalent material with smooth surface. The flange with equivalent packing of oil-resistant mate-rial must be able to withstand a working pressure of 6 kg/m^2



Guidelines for maximum offloading quantity under "no special fee" arrangement (when the last port of call before Copenhagen is a port in the Baltic Sea, the Kattegat, the Skagerrak, the North Sea and the English Channel):

Kattegat - within a line from Skagen to Wallhamn (both ports included)	2 m^3
<u>Limfjorden, Østersøen</u> - within a line from Karlskrona to Kolobrzeg (both ports included)	2 m^3
Skagerrak, the Baltic Sea, the Gulf of Bothnia, Esbjerg	5 m^3
Hamburg, Bremen/Bremerhaven via the Kieler Kanal	2 m^3
Hamburg, Bremen/Bremerhaven via Skaw	5 m^3
Gulf of Finland	7.5 m^3
UK North Sea ports, the Netherlands, Belgium and French and English Channel ports	$7,5 \text{ m}^3$
Norwegian ports from Oslo to Bergen	5 m^3
Norwegian ports north of Bergen	7,5m³

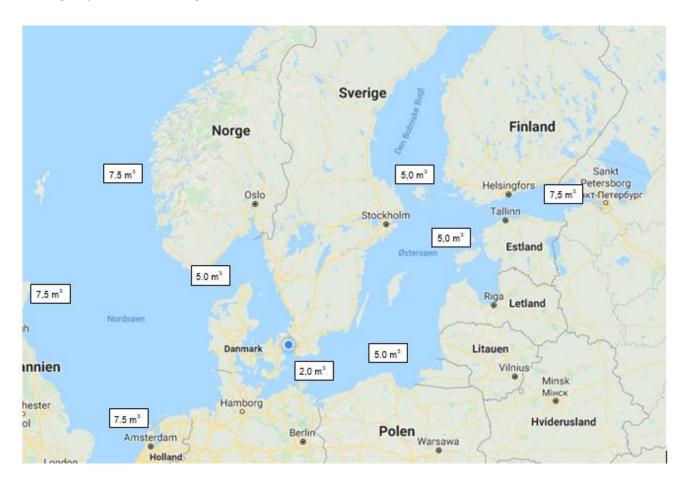

For ships arriving from <u>other ports</u>, the maximum quantity that may be offloaded under "no special fee" is calculated as follows, where B is the vessel's BHP in 1,000s and H is the number of hours of sailing from the last port of call..

B x H x 1/200 m³

If the vessel's engine power is given in kW, multiply by 1.36 to obtain BHP. The amount calculated is rounded up to the nearest whole number



Oil-mixed ballast and tank washes (Oily cargo residues)

Specific provisions and points of attention

- Mobile reception facility
- Oil-mixed ballast and tank washes shall not contain petro- or other chemicals preventing separation in an oil and water phase.
- The ship shall complete Annex 3, which shall be forwarded in advance together with Annex 1.
- The ship shall be fitted with standard flanges as shown in the table below.
- The cost of disposing of cargo residues is borne by the ship and is settled according to CMP's List of Charges, which can be viewed on the CMP website.

Standard dimensions for flanges for the connection point between the recipient scheme's pipes		
and the ship's discharge	pipes for Oily residues (Sludge) from engine rooms' gutters, and Oily	
tank washings		
Description:	Dimensions:	
External diameter:	215 mm	
Internal diameter:	Equivalent to the pipe's external diameter	
Bolt ring diameter:	183 mm	
Flange cut outs:	6 holes with a diameter of 22 mm to be placed at equal intervals on a	
	bolt ring of the aforementioned diameter cut out to the flange's	
	circumference. The breadth of the cut-out must be 22 mm.	
Flange thickness:	20 mm	
Bolt and nuts:	6, each of 20 mm in diameter, of a suitable length	
number and diameters		

The flange must match pipes with an internal diameter of up to 125 mm and must be of steel or other equivalent material with smooth surface. The flange with equivalent packing of oil resistant material must be able to withstand a working pressure of 6 kg/m2



Scrubber residues

According to the Order on the sulphur content of solid and liquid fuels, Annex 2, washing water from the use of exhaust treatment systems shall not be discharged unless the ship operator has demonstrated that it has no significant adverse effects on human health and the environment.

If the chemical used is caustic soda, it is sufficient for the washing water to meet the requirements of Resolution MEPC. 259(68) and that its pH does not exceed 8,0. Ports entered by ships which will deliver residues from exhaust gas treatment shall ensure that a system is put in place to receive this waste.

Standard dimensions for	flanges for the connection point between the recipient scheme's pipes
and the ship's discharge	pipes for Oily residues (Sludge) from engine rooms' gutters, and Oily
tank washings	
Description:	Dimensions:
External diameter:	215 mm
Internal diameter:	Equivalent to the pipe's external diameter
Bolt ring diameter:	183 mm
Flange cut outs:	6 holes with a diameter of 22 mm to be placed at equal intervals on a
	bolt ring of the aforementioned diameter cut out to the flange's
	circumference. The breadth of the cut-out must be 22 mm.
Flange thickness:	20 mm
Bolt and nuts:	6, each of 20 mm in diameter, of a suitable length
number and diameters	
-1 CI	

The flange must match pipes with an internal diameter of up to 125 mm and must be of steel or other equivalent material with smooth surface. The flange with equivalent packing of oil resistant material must be able to withstand a working pressure of 6 kg/m2



Sewage

Specific provisions and points of attention

- Mobile receiving facility. Sewer wastewater is treated at the municipal wastewater treatment plant, The Lynetten Wastewater Treatment Plant, http://www.biofos.dk/.
- In large quantities, it is possible to deploy three tank cars of 30 m3 per hour, depending on the pumping capacity of the ship and the time available.
- At Ocean quay, it is delivered directly to CMP's reception facility in the quay, and from here is directed to the municipal treatment plant.
- Before delivery to CMP's receiving facility, Annex 4 must be signed by the ship.
- Reception under "no special fee" is provided that:
- The ship delivers at the ship's side with a pumping capacity of at least 50 m3 per hour.
- Tank cars have access to and from the pick-up point without any time delay.
- The ship is equipped with standard flanges as shown in the table below.
- The wastewater is sufficiently liquid and pumpable.

Standard dimensions for flanges for the cor	nnection point between the recipient scheme's pipes
and the ship's discharge pipes for Sewage	
Description:	Dimensions:
External diameter:	210 mm
Internal diameter:	Equivalent to the pipe's external diameter
Bolt ring diameter:	170 mm
Flange cut-outs:	4 holes with a diameter of 18 mm to be placed at equal intervals on a bolt ring of the aforementioned diameter cut out to the flange's circumference. The breadth of the cut-out must be 18 mm.
Flange thickness:	16 mm
Bolt and nuts: number and diameter	4, each of 16 mm in diameter of a suitable length

The flange must match pipes with an internal diameter of up to 100 mm and must be of steel or other equivalent material with smooth surface. The flange with equivalent packing of oil resistant material must be able to withstand a working pressure of 6 kg/m2



Residual waste/small combustable waste, food waste and recyclable fractions

According to the Executive Order of the Law on the Protection of the Marine Environment, waste discharges must not take place in The Danish Territorial Waters.

According to the Executive Order on Standard Rules for Compliance with Order in Danish Commercial Ports § 21, waste may, unless otherwise agreed with the port authority, not be unloaded, or placed on the port area. Installed waste containers must not be used for environmentally harmful and hazardous products, substances, and materials. Containers are intended only for general ship generated waste.

Specific provisions and points of attention

- 22 m3 containers for cruise ships which are delivered at ship calls and picked up continuously.
- 8 m3 containers at the Container Terminal and the Prøvestenen are available 24 H. See maps of fixed containers in section
- Reception under "no special fee" is provided that:

Residual waste/ Small incineration waste NOT containing large incineration waste or Hazardous Waste.

Residual waste/ Small incineration-appropriate waste and large incineration-appropriate waste are delivered in separate containers.

Residual waste/ Small incinerated waste NOT loaded into container as bigbags or compressed in bales (can get stuck in the funnel to the oven on the incineration and cause stoppages).

Residual waste/ Small combustible appropriate waste and Food waste

Residual waste/ Small incineration-appropriate waste is non-recyclable residual waste (less than 100x50x50 cm). Small amounts of wet and dirty packaging (cardboard and plastic), flamingo, rubber gloves, mixed materials products, etc.

Food waste is collected in non leaking sacks along with Residual Waste/ Small incineration waste. Food waste can also be collected on pallets or in plastic coated cardboard boxes max 1 m3, which can be carried into the container.

Residual waste/ Small incineration-appropriate waste and Food waste is driven directly to incineration at the Amager Resource Centre where the waste is recorded, weighed, destroyed by incineration and converted into district heating and electricity, www.a-r-c.dk



Catering waste from ships on international voyages (Category 1 waste) shall be transported without undue delay to an approved incineration plant where the waste is weighed and destroyed by incineration.

Large combustible waste

- Waste for sorting, larger than 100 cm.
- Typically, large quantities of wood that can be recycled, furniture, mattresses, furniture, carpets, broken pallets, wood, ropes, larger quantities not recyclable (wet and dirty)
- Paper, cardboard, and plastic.
- Received on pallets, in boxes and in big bags which can be driven into container.
- The waste is driven to sorting, where recyclable waste is discarded and sent to recycling. The remainder is subdivided and driven to combustion at the Amager Resource Centre where the waste is recorded, weighed, destroyed by incineration, and converted into district heating and electricity, www.a-r-c.dk

CMP's own collection at Ocean Quay

At Oceankaj, CMP has its own collection of whole pallets, clean plastic, dry cardboard, glass (without porcelain), iron, metal and aluminums, electronic waste, small batteries, accumulator, and light sources, for recycling.


The rest is collected by the carrier as Large Combustion Waste.

The two Waste receipts "CMP Waste receipts - Garbage and Hazardous waste" and "CMP Waste receipt - CMP own reception on Oceankaj" show whether the waste has been collected as Large combustible waste for incineration or directly on to recycling.

For further information see "Summary of Waste management plan for ship generated waste, Copenhagen Malmö Port, Copenhagen - Cruise ships".



Signage of containers:



1.1 Map showing available containers.



COPENHAGEN MALMÖ PORT

Containerterminalen - Levantkaj - Kaj 260	
Amagerværket/ HOFOR - Kaj 838	
Prøvestenen Vådbulk Kaj 840/ K-vej	
Prøvestenen Vådbulk Kaj 843 – Ocean Pier/ O-vej	
Prøvestenen Vådbulk Kaj 853 + 854/ G-vej	
Prøvestenen Tørbulk Kaj nr. 858 + 859/ Bastionvej	
Prøvestenen Tørbulk Kaj 862 – 866/ UPS arealet	

Hazardous waste.

Installed waste containers must not be used for environmentally harmful and hazardous products, substances, and materials. Containers are intended only for general ship-generated waste. According to the Copenhagen Municipal Regulations for commercial waste, hazardous waste must be properly packaged. The packaging must be sealed and closed tightly so that the contents cannot inadvertently escape. The packaging must be designed so that full or partial emptying can be carried out in a safe manner. Hazardous waste collected packaged must be stored in suitable containers on a dense bottom without the possibility of drainage to sewers, soil, streams, or groundwater.

Specific provisions and points of attention

- Electronic waste, small batteries, accumulator, hazardous waste, chemical waste, medical waste, waste oils in barrels, oil cloths, oil filter, light sources, dry cleaner waste, inducing fluid, røngten fluid and spray cans, etc.
- Hazardous waste must be source-sorted and packaged and declared in accordance with the applicable IMO regulations.
- Mobile modtagefacilitet
- Reception under "no special fee" is provided that:

The waste is source sorted to avoid latency and charge for cleaning up and sorting.

The waste is not diluted or mixed with other hazardous waste

The ship delivers hazardous waste in UN-approved packaging.

"Other Hazardous waste" is specified in Annex 1.



Incinerator ash and other solid special waste

Solid special waste: incinerator ash, solid scrubber waste, toilet residues from sewage (solid), residues from grease, hair, soap residue (solid), pyrotechnic distress signals, MOB smoke floats and fire extinguishers.

Specific provisions and points of attention

- Mobile reception facility
- For Pyrotechnic distress signals, MOB smoke floats and Fire extinguishers minimum 3 working days of alert
- Incinerator ash (dry) is collected in retractable sealed bigbags.
- Scrubber waste (solid) is collected in UN-approved plastic casks.
- Toilet residues from sewage (solid) are collected in UN-approved plastic casks.
- Residues from fat, hair, soap residue (solid) are collected in UN-approved plastic casks.
- Pyrotechnic distress signals, MOB smoke floats are collected in UN-approved clamping dish with removable vermiculite lid, max 5 kilos of NEM (net explosive mass) per clamped tab
- Fire extinguishers are collected in UN-approved clamping dish with removable vermiculite lid, max 5 kilos of NEM (net explosive mass) per clamp dish Only one per platter.
- CMP can help with the delivery and return of UN-approved plastic casks and big bags.
- Costs are borne by the ship and settled according to CMP's List of charges.



Carriers and collectors

The following carriers used by CMP are registered in the Danish Environmental Protection Agency's Waste Register https://www.affaldsregister.mst.dk/default.aspx

Avista Oil Danmark A/S, Juelsmindevej 6/18 4400 Kalundborg.

Registered in the Danish Environmental Protection Agency's Waste Register as a carrier with ADR certificate.

ISO 14001 certificeret.

https://www.avista-oil.dk/fileadmin/avista-oil/Dokumente/downloads/DK/ISO14001.pdf

Johs. Rasmussen Svebølle A/S, Øresøvej 2, 4470 Svebølle.

Registered in the Danish Environmental Protection Agency's Waste Register as a carrier with ADR certificate.

ISO 9001 and ISO 14001 certified.

http://www.johs-rasmussen.dk/om-jr/

Henrik Tofteng A/S, Nyager 6, 2605 Brøndby.

Registered in the Danish Environmental Protection Agency's Waste Register as a collector.

ISO 14001 certificeret.

http://tofteng.dk/iso-certifikater/

SMOKA I/S, U-Vej 7, 2300 Copenhagen S.

Registered in the Danish Environmental Protection Agency's Waste Register as a carrier with ADR certificate.

ISO 9001 and ISO 14001 certificeret.

http://www.smoka.dk/om-os/miljoe-arbejdsmiljoe-og-kvalitetspolitik.aspx

CMP disclaims any responsibility for the reliability of the information displayed on the website of the Danish Environmental Protection Agency and supplier.



COPENHAGEN MALMÖ PORT

Annex 1 CMP Waste order form (NOT CRUISE SHIPS) 2021 - 24 hours in advance of arrival E-mail portoffice@cmport.com

Name of ship: Berth no: Project no. completed by CMP: _

IMO number: **Last Port and Country: Ship Agent:**

Ship arrival Date: **Arrival Time: Departure Date:** Time:

Waste delivery Date: **Delivery Time:** Name/ Signature:

CMP waste management plan	Type of waste	Amount for discharge	Comments	Waste operators
pian	MARPOL Annex 1 – Oil	(m³)		
Section 5.	Oily residues (Sludge)			_
Section 6. Complete Annex 3	Oily tank washings			ran l
	MARPOL Annex VI – Air pollution	(m³)	Comments	AVISTA OII
Section 7. Complete Annex 3	Exhaust gas-cleaning residues - Scrubber (fluid) AEP scrubber effluents (fluid)	l l	PH value:	AVISTA OIL
ompiete Annex 3	MARPOL Annex IV – Sewage	(m³)	(PH 5,5 – 8,5) Comments	
Section 8.	Sewage (Black water and Grey water)	(1112)	Comments	
omplete Annex 4				JR
	MARPOL Annex V – Garbage	(m³)	Comments	
Section 9.	SMALL WASTE and FOOD WASTE for incineration - Clear plastic bags - <i>Maximum size 100x50x50 cm</i>			Seat Seat
Section 10.	WOODEN PALLETS for recycling Put next to the red container - Will be picked up by CMP			
	LARGE WASTE for pre-sorting - On pallets, in boxes or big bags			
	Clean PLASTIC - Sorted in rigid, soft and PET bottles			
	Dry and clean CARDBOARD - Bailed on pallets			
	GLASS for recycling (NO crockery or mirror) - In big bags			6
	CROCKERY for landfill (NO glass) - In big bags			HENRIK TOFTE
	IRON, METAL, ALUMINIUM, TIN CANS - On pallets or in boxes			-
	MOORING LINES, STEEL WIRE - On pallets FURNITURE, CARPETS, MATTRESSES - Please specify			
	OTHER GARBAGE - Please specify			
	, , , ,	(g Co	mments/ UN Numbe	r
	BATTERIES, ACCUMULATOR - In plastic bags or cardboard boxes			
	ELECTRONICS - In cardboard boxes			
	LIGHT BULPS, FLUORESCENT LAMPS - In boxes			SMOKA
-	PAINT, THINNERS, CHEMICALS - With correct labels on each			
	MEDICALS, BIO HAZARDOUS - In plastic bags or cardboard boxes			
	OILY SLUDGE in drums, OILY RAGS, OIL FILTERS etc.			SMOKA
	COOKING OIL			
	OTHER HAZARDOUS waste - Please specify			
	INCINERATOR ASH - In liftable sealed big bags			
Section 11.	SCRUBBER (solid) - In UN drums			SM•K
	BLACK WATER/ GREY WATER residues (solid) - In UN drums	+		J V. (1)
	FIRE EXTINGUISHER - Gas art requirement !			-
	EMERGENCY PYROTECHNICS/ MOB SMOKE FLOATS -Safety data sheet requirement!			Damasec



COPENHAGEN MALMÖ PORT

Annex 1 CMP Waste order form 2021 - 24 hours in advance of arrival

E-mail portoffice@cmport.com

Name of ship: Berth no: Project no. completed by CMP: _

IMO number: **Last Port and Country: Ship Agent:**

Ship arrival Date: **Arrival Time: Departure Date:** Time:

Delivery Time: Name/ Signature: **Waste delivery Date:**

CMP waste management	Type of waste	Amount for discharge	Comments	Waste operators
plan	MARROL Arrest 1 Oil			
Section 5.	MARPOL Annex 1 – Oil Oily residues (Sludge)	(m³)		
Section 6.	Only residues (Studge)			-
Complete Annex 3	Oily tank washings			
	MARPOL Annex VI – Air pollution	(m³)	Comments	
Section 7. Complete Annex 3	Exhaust gas-cleaning residues - Scrubber (fluid) AEP scrubber effluents (fluid)		PH value: (PH 5,5 – 8,5)	AVISTA OIL
	MARPOL Annex IV – Sewage	(m³)	Comments	
Section 8. Complete Annex 4	Sewage (Black water and Grey water) Treated Waste Water			JR
	MARPOL Annex V – Garbage	(m³)	Comments - Please specify	
Section 9.	SMALL WASTE and FOOD WASTE for incineration - Clear plastic bags - Maximum size 100x50x50 cm			
and Section 10.	LARGE WASTE for pre-sorting - On pallets, in boxes or big bags			
000110111 201	*WOODEN PALLETS for recycling, SCRAP WOOD			6
	*Clean PLASTIC - Sorted in rigid, soft and PET bottles			HENRIK TOFTEN
	*Dry and clean CARDBOARD - Bailed on pallets			*CMP own
	*GLASS for recycling (NO crockery or mirror) - In big bags			reception on
	*CROCKERY for landfill (NO glass) - In big bags			Oceankaj
	*IRON, METAL, ALUMINIUM, TIN CANS - On pallets or in boxes			
	MOORING LINES, STEEL WIRE - On pallets FURNITURE, CARPETS, MATTRESSES - Please specify			
	*ELECTRONICS - On pallets, in boxes or big bags			
	COOKING OIL - In 1 m3 tote or 60 L UN drum only			
	SALE of 1 m3 TOTES or 60 L UN DRUMS for cooking oil			
	OTHER GARBAGE - Please specify			
		Kg	Comments/ UN Number	
	*BATTERIES, ACCUMULATOR			
	*LIGHT BULPS, FLUORESCENT LAMPS			CN/AI/A
	PAINT, THINNERS, CHEMICALS - Please specify			SM•KA
	MEDICALS, BIO HAZARDOUS waste - Please specify			***************************************
	OILY SLUDGE in drums, OILY RAGS, OIL FILTERS			*CMP own reception on
	SALE of UN drums and big bags - Please specify			Oceankaj
	OTHER HAZARDOUS waste - Please specify			
0	INCINERATOR ASH - In liftable sealed big bags			
Section 11.	SCRUBBER (solid) - In UN drums			
	BLACK WATER/ GREY WATER residues (solid) - In UN drums			
	FIRE EXTINGUISHER - Gas art requirement !			
	EMERGENCY PYROTECHNICS/ MOB SMOKE FLOATS -Safety data sheet requirement!			Damasec



If the master of a ship finds it necessary to direct the attention of the environmental authorities to inadequate waste reception facilities, the following information and any further documentation should be sent to the Port Administration (Maritime Service). The Port Administration will forward a copy to the Danish Environmental Protection Agency. Name of port: Copenhagen Malmø Port AB Harbour section (quay or berth number): Date of arrival in the Port:

Amount and type of waste to be delivered to the waste reception 2. facilities: Special problems, such as: **Unnecessary delay: Inadequate waste reception** 3. facilities: Not technically possible to use waste reception facilities: Other: Remarks: (e.g. information received from the port authorities or the 4. operator of waste reception facilities regarding point 2) Ship data: Ship name: IMO number or call sign: 5. Home port: Owner or operator: Number of persons on board:



Ship name:

IMO number:
Last 3 cargoes:

AEP scrubber effluents (fluid)

Annex 3 Oliy ballast, tank rinse and scrubber wash – available at www.cmport.com

Annex 3 Oily tank washings and Scrubber (fluid) Exhaust gas-cleaning residues – Scrubber (fluid) AEP scrubber effluents (fluid)

(Information for vendor purpose only)

Berth no.

	Product informati	on	Estimated amount (m³)
Desidence of all	1. Oil		
Residues of oil and oil mixture	2. Mixture		
	3. Does the oil contain emulsifier?	Yes: No:	
	4. Hazard class (national)	I	
flashpoint: 1<21°, II<50°	flashpoint: 1<21°, II<50°,	II	
		III	
	5. Any chemicals other than emulsifier and standard additives?	Yes: No:	
	Describe the chemicals:		
Exhaust gas-cle	aning residues – Scrubber	PH value: (PH 5,5 – 8,5)	

I hereby declare that the above stated amount of liquid residues is correct and in accordance with the Reception facilities for ship-generated waste in areas operated by Copenhagen Malmö Port in Copenhagen.

Conductivity: <70 mS/cm

Total-Nitrogen: <1.000 mg N/I

Density: 1,2 g/ml COD: < 20.000 mg/l

Sulfur: <25

Delivery	/ Date:	Time:	Name/ Signature:



Annex 4 Sewage – available at www.cmport.com

Annex 4 Sewage (Black water and Grey water)

Name of ship :	Berth no.
IMO number:	
Estimated volume of Sewage m³:	Treated wastewater m³:
•	scharging will not be effected to the pipe system P will not keep watch during pumping. If any problems call 2 or Phone +45 35 46 11 38